

Fulcrum*Thermoplastic Composites are produced from an engineering thermoplastic polyurethane (ETPU) matrix using the patented Fulcrum* Technology process.

Fulcrum* Technology has no volatile organic compound (VOC) emissions and can produce solid and hollow profiles using pultrusion techniques.

Fulcrum* Composite materials typically have high strength and stiffness, greater toughness, and better damage tolerance than most thermoset materials.


Additionally, Fulcrum* Composites can be produced at higher speeds with greater design freedom than typical pultrusion processes. And, scrap material from Fulcrum* Composites can be recycled and used in other thermoplastic processes.

Typical Properties for FULCRUM Thermoplastic Composite Materials

Properties ^(1,2)	Test Method	English Units		S.I. Units	
		High Glass Content	Typical Glass Content	High Glass Content	Typical Glass Content
Physical					
Glass Content, % by Volume	Burn Off	59%	47%	59%	47%
Glass Content, % by Weight	–	76%	66%	76%	66%
Density	ASTM D 792	0.069 lb/in ³	0.067 lb/in ³	1.91 g/cm ³	1.86 g/cm ³
Water Absorption, 24 hrs ⁽³⁾	ISO 62	0.13%	0.13%	0.13%	0.13%
Mechanical					
Flexural Modulus	ASTM D 790	6.53x10 ⁶ psi	5.14x10 ⁶ psi	45 GPa	35 GPa
	Transverse ASTM D 4476	870,000 psi –	684,800 psi 5.80x10 ⁶ psi	6.7 GPa –	4.7 GPa 40 GPa
Flexural Strength	ASTM D 790	167,000 psi	131,450 psi	1150 MPa	906 MPa
	Transverse ASTM D 4476	17,400 psi –	10,000 psi 152,300 psi	120 MPa –	69 MPa 1050 MPa
Tensile Modulus	ASTM D 3039	6.53x10 ⁶ psi	5.14x10 ⁶ psi	45 GPa	35 GPa
Tensile Strength	ASTM D 3039	145,000 psi	–	1000 MPa	–
Tensile Elongation	ASTM D 3039	2.2%	–	2.2%	–
Compressive Modulus	ASTM D 695	6.67x10 ⁶ psi	5.08x10 ⁶ psi	46 GPa	35 GPa
Compressive Strength	ASTM D 695	114,900 psi	63,800 psi	792 MPa	440 MPa
Compressive Elongation	ASTM D 695	–	1.5%	–	1.5%
Shear Strength	ASTM D 3846	8,000 psi	N/A	55 MPa	N/A
	ASTM D 4475	N/A	No break	N/A	No break
Izod Impact	ASTM D 4812	102 ft-lb/in	110 ft-lb/in	5460 J/m	5900 J/m
Notched Izod Impact	ASTM D 256	79 ft-lb/in	77 ft-lb/in	4200 J/m	4100 J/m
Instrumented Impact	ASTM D 3763	265 in-lb	–	30 J	–
Electrical					
Dielectric Strength ⁽⁴⁾	ASTM D 149	> 34 kV/in	–	> 1.3 kV/mm	–
Thermal					
Coefficient of Linear Thermal Expansion	ASTM D 696	5.0x10 ⁻⁶ in/in/°F	3.8x10 ⁻⁶ in/in/°F	9.0x10 ⁻⁶ mm/mm/°C	6.9x10 ⁻⁶ mm/mm/°C
	Transverse	2.9x10 ⁻⁵ in/in/°F	2.5x10 ⁻⁵ in/in/°F	5.2x10 ⁻⁵ mm/mm/°C	4.5x10 ⁻⁵ mm/mm/°C
Thermal Conductivity	Parallel	5.6 BTU-in/hr-ft ² -°F	4.7 BTU-in/hr-ft ² -°F	0.808 W/m-K	0.685 W/m-K
	Transverse	3.1 BTU-in/hr-ft ² -°F	2.1 BTU-in/hr-ft ² -°F	0.449 W/m-K	0.303 W/m-K
Heat Deflection Temperature ⁽⁵⁾	–	176°F	–	80°C	–
Glass Transition Temperature ⁽⁶⁾	–	194°F	–	90°C	–

(1) Typical property values, not to be used for design.
 (2) Uni-directional glass fibers only, no off-axis materials.
 (3) Conditioned at 50°C for 24 hrs then submerged in 23°C water for 24 hrs. Specimen size: 20 mm x 2 mm x 50 mm long.
 (4) Results vary with thickness. Specimen size: 20 mm x 2 mm x 30 mm long. Test was stopped at 40 kV due to arc formation between electrodes.
 (5) A common thermoplastic test standard providing a temperature at which a 0.010 inch deflection occurs with a psi fiber stress.
 (6) Temperature at which thermoplastic begins to lose its rigidity.

Figure 1 – Elevated Temperature Creep Data

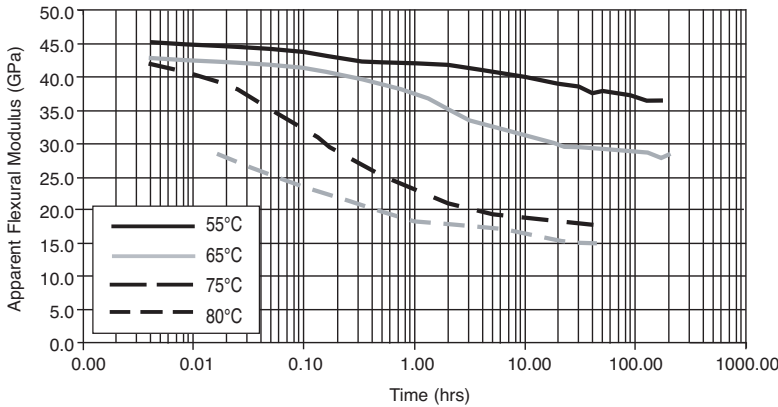

The curves in **Figure 1** show the response of Fulcrum* Composite material to a continuously applied load at elevated temperature over an extended time period.

Figure 2 – Temperature Effect on Flex Modulus


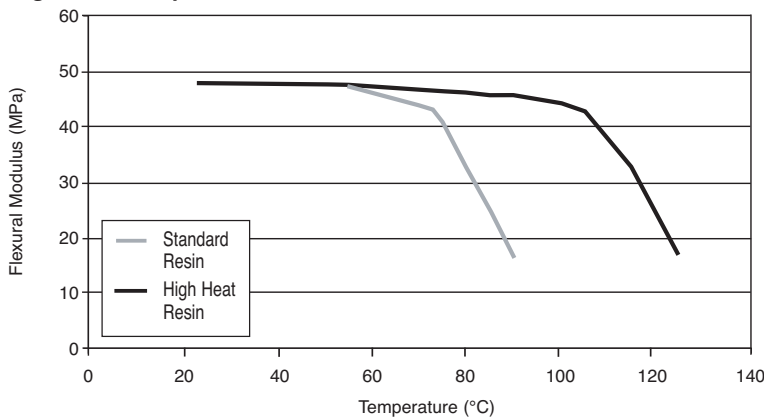


Figure 2 shows the effect of temperature on short term modulus of the material. The standard resin is the one most frequently used and is the same resin for which all of the single point data was generated. The high heat resin is an alternative grade which can be used where higher heat resistance is required.

Figure 3 – Notched Fatigue

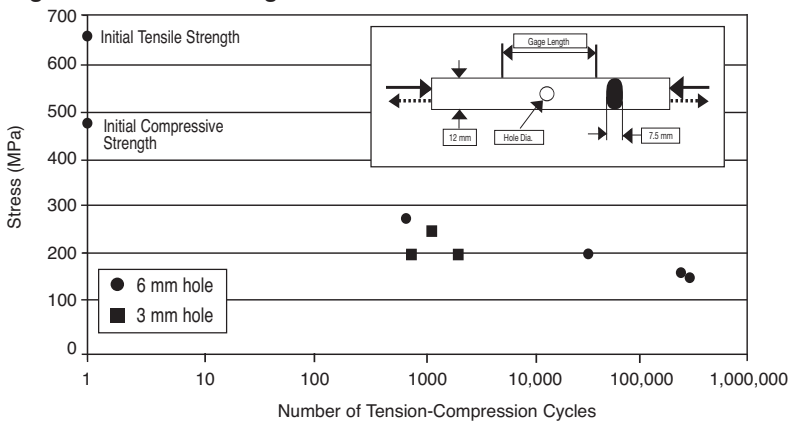

The data in **Figure 3** shows the effect of repeated tension-compression loading on samples which are notched by drilling a small hole in the center of the gage length. The hole acts as a stress concentration point, which lowers the initial strength of the composite. Extended cycling between tension and compression further reduces the strength. This is not a standard test, but gives an indication of how the material performs under complex geometry and loading conditions.

* Fulcrum is a trademark of Fulcrum Composites, Inc.

FULCRUM COMPOSITES, INC.
 1407 East Grove Street
 Midland, MI 48640
 Tel: +1 989 636 1025
 Fax: +1 989 837 1566
 info@fulcrumcomposites.com
 www.fulcrumcomposites.com

TOP GLASS S.p.A.
 Via dei Soldani, 3 - I - 23875 Osnago (LC)
 Tel +39 039 95223.1 - Fax +39 039 587787
 info@topglass.it - www.topglass.it



Composite Solutions

Part of the KEMROCK™ Global Composite Village™